
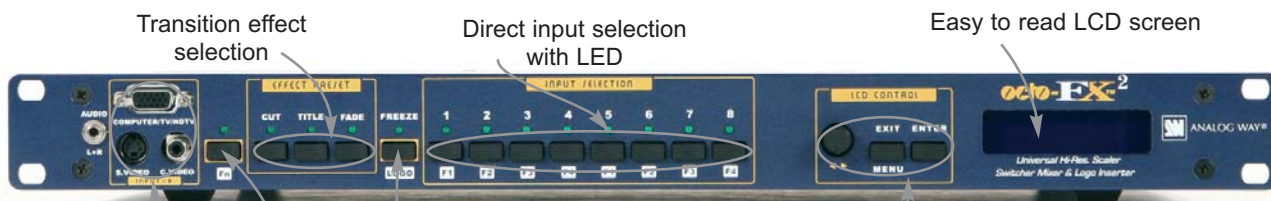


# Octo FX<sup>2</sup>™

HD Seamless Switcher for Conference Rooms, Houses of Worship and Large Screen Projections

**New!**

**Model. OFX803**

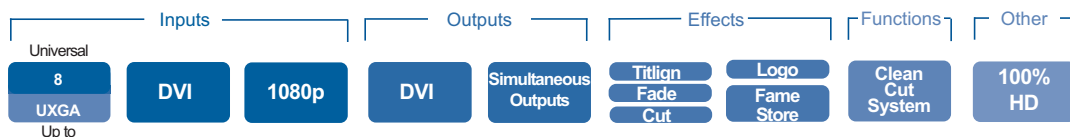


Convenient front input

Function

Freeze

Control Menu

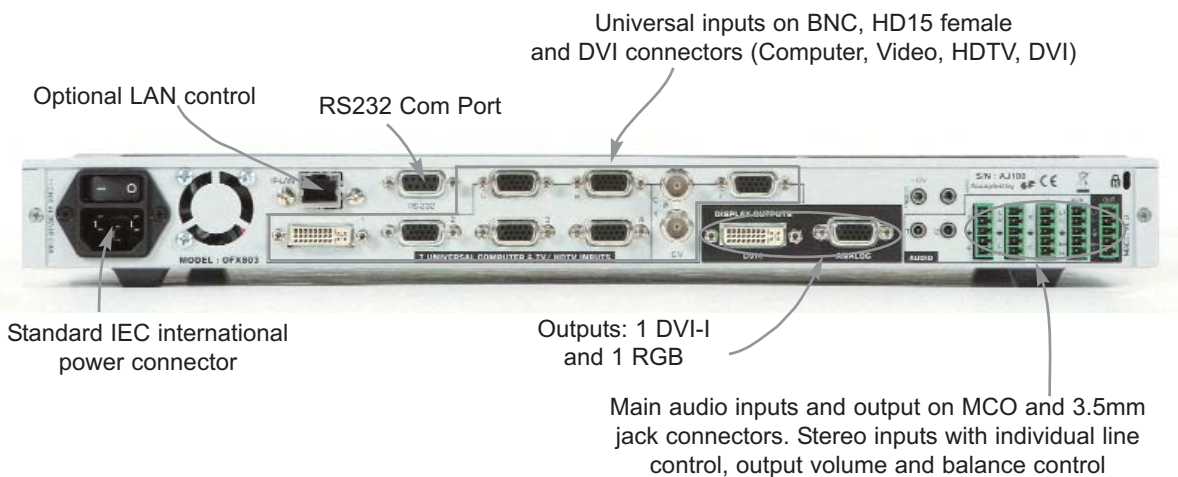

## Inputs

- 8 universal inputs with 1 DVI
- Computer and DVI up to UXGA / 1080p
- Video : NTSC/PAL/SECAM, S. Video, YUV, RGB, HDTV
- 8 + 1 Stereo Audio with level adjustment for each input

## Outputs

- 1 DVI + 2 RGB up to UXGA / 1080p
- Audio Stereo with level adjustment

## Effects

- Fade, Titling, Cut and Frame Stores
- Ultra fast and smooth or colored switching
- Logo insertion : 1 still and 8 animated logos
- 4 frame stores in non volatile memory



ANALOG WAY®

[www.analogway.com](http://www.analogway.com)

P/N : OFX803/B1107-VA

# Seamless Switchers

## Technical Specifications

### 8 Universal Inputs

- **Composite Video** NTSC = 15.735 kHz/60 Hz  
PAL/SECAM = 15.625 kHz/50Hz
- **S.Video (Y/C)** NTSC = 15.735 kHz  
PAL/SECAM = 15.625 kHz/50Hz
- **Component (YUV)** 15.625 kHz/50 Hz – 625L  
15.735 kHz/60 Hz – 525L
- **RGB/S** (TTL or 0.3V Analog), **RGsB** (SOG: 0.3V Analog),  
15.625 kHz/50 Hz - 625L, 15.735 kHz/ 60 Hz - 525L
- **HDTV:** Component (HDYUV 2/3 Level Sync.) 1080i/60-50Hz,  
720p/60-50Hz, 480p/60Hz
- **Computer** (RGB HV, RGB/S and RGsB): PC, Mac, Workstation.  
Automatic Sync. & centering. Resolution from 640x480 to  
1600x1200 (up to 110kHz)
- **DVI:** Digital computer up to 1600x1200RB/60Hz and  
1920x1080/60Hz (Fpx: 165MHz max)

### Audio Inputs

#### 8 + 1 Stereo Inputs

- 2 balanced audio inputs
- 7 unbalanced audio inputs
- Vi = + 18 dBu max
- Zi = 20 kOhms unbalanced
- Zi = 40 kOhms balanced
- Gain: adjustable

### Display Output

- 2 x Buffered outputs (1 on HD15 F connector and 1 on DVI-I connector) RGB HV, RGB/S or RGsB selectable (H&V separated, Sync. Composite or SOG), RGB= 0.7Vp/p (75 Ohms)
  - 1 x DVI-D on DVI-I connector
  - Resolution: **4/3 & 5/4** = SVGA, XGA, SXGA+, UXGA,  
**16/9 & 16/10** = WWGA, WSVGA, WXGA, WSXGA, WSXGA+, 1080p
  - Rate: Internal 50, 60, 72(\*) & 75(\*) Hz (Follow)
- (\*) : depending on resolution

### Audio Output

- Stereo output (balanced & unbalanced)
- Vo = + 18 dBu max - Zo = 300 Ohms (unbalanced)
- Vo = + 24 dBu max - Zo = 600 Ohms (balanced)
- G = 0dB nominal, with volume

### User Controls and Connectors

#### FRONT PANEL

##### User controls:

- Selection of inputs 1 to 8 and frame stores
- Programmable effect keys
- Freeze, Logo
- LCD screen & control buttons for menu: Test patterns, proc. image adjust., input format selection, output format display, output format & sync., audio input level and output, volume adjustments, position & size adjustments, front panel control lockout

##### Input Connectors:

- Input #8: Video - RCA, Mini DIN 4 and HD15F Audio - Jack Stereo 3.5

##### REAR PANEL

##### Input Connectors:

- Input #1: DVI-I
- Inputs #2 to #6: HD 15F
- Input #7: HD 15F + 2 BNC
- Audio inputs 3 to 7 and auxiliary: on 5-pin screw terminal
- Audio inputs 1 and 2: on 3.5 jack stereo

##### Output Connectors:

- Video: DVI-I + HD 15F
- Audio: 5-pin screw terminal

##### Other:

- 1 x DB9F with 2 RS232 ports
- 1 x Jack 3.5 : +12Vdc trigger
- Optional Ethernet Port 10/100BT: RJ45

### Power Supply

Internal, universal, automatic, 100-250, VAC;50/60 Hz (50 W) (UL, CSA, GS, CE), ON/OFF AC Main Switch

### Supplied with

- 1 x Power cable
- 1 x Set of 5 audio 5-pin screw terminals
- 1 x DVI-VGA adapter
- 1 x HD15M-5BNC adapter cable of 0.5m (1.5ft)
- 1 x Remote control software
- 1 x User Manual

### Dimensions - 19", 1U compatible

- D 10.4" x W 19" x H 1.74"
- D 265 mm x W 482 mm x H 44 mm

### Weight: 3.5 kg (7.7 lbs)

### Warranty

3 year warranty on parts and labor back to factory

### Specifications subject to change without prior notice

### USA, Canada, South America and The Carribeans

ANALOG WAY Inc.  
Tel. 212 269 1902  
Fax. 212 269 1943  
Email: salesusa@analogway.com

### Europe, Africa and Middle-East

ANALOG WAY FRANCE  
Tel. 331 64 47 16 03  
Fax. 331 64 47 14 73  
Email: saleseuro@analogway.com

### Asia and Asia Pacific

ANALOG WAY Pte Ltd  
Tel.: 65 62 92 58 00  
Fax.: 65 62 92 52 05  
Email: sales@analogwayasia.com

**Octo FX<sup>2</sup>™** by Analog Way is a **High Resolution Digital and Analog, Computer & Video Scaler Seamless Switcher**. OFX803 offers many effects: **Fade, titling, logo insertion** (1 animated and 8 still) and **frame store**.

**OFX 803** is fitted with 8 Universal A/V inputs including one DVI, and 3 outputs: 2 Analog and 1 DVI. It performs an ultra fast and smooth transition between any Video or Computer sources. It also allows a true seamless cut between one computer Input (direct) and any other Video or Computer Input.

**OFX 803** is a High Performance, State of the Art, Up/Down Video and Computer Scaler. Ready to fit the native resolution of the latest HD display devices, it provides a high quality image thanks to its high quality digital decoder, improved 3:2 and 2:2 pull down circuitry, auto-adaptative pixel by pixel 3D motion compensation, time base corrector, frame rate converter & follower.

Easy to use, **OFX 803** offers an Auto Setup function and a powerful Auto Clock & Phase for Computers. Each input image control - brightness, contrast, color, hue, processing, aspect ratio, zoom, etc ... - can be individually set and stored in non volatile memories.

Each of the 8 Inputs is fitted with a stereo audio line. The audio can either follow or break away from the Video image.

One additional audio stereo input is provided to be mixed with the Video input audio line. **OFX 803** is fitted with a Dual RS232 Com port for Integral remote control and automatic control of other devices in the installation. Field upgradable firmware maintains the high value of your equipment. Upgrades are available on the Analog Way web site. An optional TCP/IP connection allows for remote control and/or upgrade.

This ultra compact and user friendly device is designed for high resolution A/V presentation displays, Houses of Worship, conference and boardrooms, and events.

## To Control Octo FX<sup>2</sup>

- **RKD500-T:** Remote control keypad with T-Bar
- **RKD500:** Remote control keypad
- **RKD100:** Remote Console
- **Axion:** High end event controller



Axion



RKD500-T



RKD100

## References

> **OFX803:** Octo FX<sup>2</sup> with RS232 com port

- **RKD500-T\*:** Remote control with T-Bar
- **RKD500\*:** Keypad for remote control
- **RKD100\*:** Keypad for remote control

\* : sold separately

## Option

- **OPT-LAN:** Optional TCP/IP control interface

## Cables for Octo FX<sup>2</sup>

- S.Video Cables from 1.8m/6ft to 20m/66ft
- S. Video to BNC Cables of 1.8m/6ft and 5m/16ft
- RCA Cable of 1.2m/4ft
- RCA / BNC Adapter Cables
- Jack Stereo Cable of 1.2m/4ft
- Audio Stereo Cable of 1.2m/4ft
- VGA Cables from 0.4m/1ft to 1.8m/6ft
- VGA/BNC adapter Cables of 1.8m/6ft and 3m/10ft
- Remote Cables from 0.5m/1ft to 30m/100ft