

## 4ch Multi Viewer

# MV-100

This is a multi-viewer that divides the screen into sections for displaying four SD-SDI input signals. It comes with many different information display functions including title display, audio level meter display and tally display.




- 4 SD-SDI inputs and 2 outputs (asynchronous inputs supported)
- Title display function
- Audio level meter display function (for displaying the levels of up to 4 channels)
- Various interfaces supported (option)
  - Tally input, 2-color (red, green) display supported
  - Serial control (screen display switching, title display ON/OFF, audio level display ON/OFF)
    - \* This function cannot be used together with Ethernet control.
  - Ethernet control (SNMP monitoring supported)
    - \* This function cannot be used together with serial control.


## Specifications

● Standard	525/60 or 625/50 (Auto detect)
● Signal Processing	4:2:2 component
● Quantization	10-bit
● Sampling Frequency	Y: 13.5MHz, C: 6.75MHz
● Video Input	Digital component: 270Mbps, 75Ω, 4ea., BNC (no loopthrough)
● Video Output	Digital component: 270Mbps, 75Ω, 2ea., BNC
● Interfaces (option)	<ul style="list-style-type: none"> <li>◆ REMOTE: 1ea., 25-pin D-sub (female) Input terminal: TTL negative logic pulse or make contact pulse Output terminal: Open collector negative logic</li> <li>◆ RS-422: 1ea., 9-pin D-sub (female) * This function cannot be used together with Ethernet control.</li> <li>◆ Ethernet: 10/100Base-T, 1ea., RJ-45 (SNMP) * This function cannot be used together with serial control.</li> </ul>
● Temperature / Humidity	0°C - 40°C / 30% - 90% (no condensation)
● Power / Consumption	100VAC - 240VAC ±10%, 50/60Hz / Approx. 22VA (15W) at 100VAC
● Dimensions / Weight	212 (W) x 44 (H) x 350 (D) mm / Approx. 3.0kg
● Accessories	Operation manual, AC cord
● Option	Parallel interface / Serial Interface / Ethernet Interface * Cannot be used together with Serial and Ethernet control Single or dual mount rack brackets


## External Dimensions

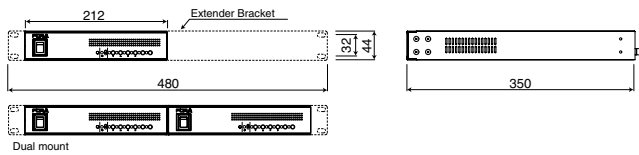

## Rear View

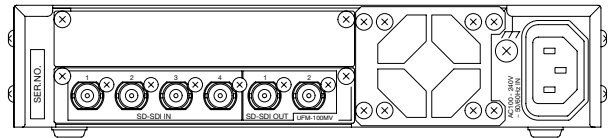

## UFM-100MV 4ch Multi Viewer

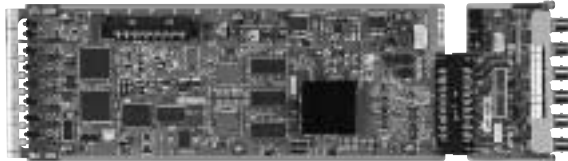

This is a module-type multi-viewer that can be installed in a UFM frame. It divides the screen into sections for displaying four SD-SDI input signals. It comes with many different information display functions including title display, audio level meter display and tally display.

### FOR-A COMPANY LIMITED

Head Office : 3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan

FOR-A America Corporate Office : 11125 Knott Ave., Suite #A, Cypress, CA 90630, U.S.A.

FOR-A America East Coast Office : 1065 Avenue of the Americas, Suite #1701A, New York, NY 10018, U.S.A.

FOR-A America Distribution & Service Center : 2400 N.E. Waldo Road, Gainesville, FL 32609, U.S.A.

FOR-A Corporation of Canada : 425 Queen St. W. #211, Toronto, Ontario M5V 2A5, CANADA

FOR-A UK Limited : UNIT C71, Barwell Business Park, Leatherhead Road, Chessington Surrey, KT9 2NY, U.K.

FOR-A Italia S.r.l. : Viale Europa 50 20093, Cologno Monzese (MI), Milan, ITALY

FOR-A Corporation of Korea : 801 Dongsan Bld., 53-1 Dongsan-Dong, Youngdeungpo-Gu, Seoul 150-800, Korea

Homepage: <http://www.for-a.com/>

+81 (0)3-3446-3936 Fax : +81 (0)3-3446-1470

+1 714-894-3311 Fax : +1 714-894-5399

+1 212-861-2758 Fax : +1 212-861-2793

+1 352-371-1505 Fax : +1 352-378-5320

+1 416-977-0343 Fax : +1 416-977-0657

+44 (0)20-8391-7979 Fax : +44 (0)20-8391-7978

+39 02-254-3635/6 Fax : +39 02-254-0477

+82 (0)2-2637-0761 Fax : +82 (0)2-2637-0760

