




LASSEN 3232HDEE 32x32

HD-SDI AND SDI VIDEO WITH 2 CHANNELS OF AES AUDIO.

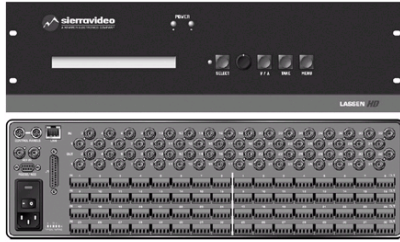

DESCRIPTION

The Lassen 32 series are high performance routing switchers for SDI (SMPTE 259) and HD-SDI (SMPTE 292) video signals. These units come in a compact 3U (5.25") frame and can be ordered with or without analog or digital audio. They can route any or all inputs to any or all outputs. HD-SDI models can input SDI and HD-SDI simultaneously, but there is no conversion between formats.

- Redundant Power Supply optional on all 3232 & 3216 series. Add "R" to the model number. Frame size = 4U (7").

LASSEN XL ANALOG (COMPOSITE) VIDEO FEATURES -

- **High Bandwidth** - 300MHz (- 3dB) fully loaded.
- **Very Low Crosstalk** - 80dB @ 1MHz, - 47dB @ 100MHz.
- **Qwik Adjust Knob™ Rotary Control interface** This user intuitive knob along with the 80 character LCD display provides quick and convenient setup, adjustment and signal switching.
- **Video Mute Capability** -
- **Genlock Input** - Looping internal sync input for vertical interval switching.
- **Output Disconnect Feature** -

LASSEN SDI VIDEO FEATURES -

- **Maximum Data Rates** - 360Mbits/sec.
- **Standards** - SMPTE 310, SMPTE 259, DVB-ASI.
- **Jitter** - < 0.2UI.

LASSEN HD VIDEO FEATURES -

- **Backwards compatible with SDI Signals** -
- **Maximum Data Rates** - 1.485Gbits/sec.
- **Standards** - SMPTE 310, SMPTE 259, SMPTE 292, DVB-ASI.
- **Jitter** - < 0.2UI.

ANALOG AUDIO FEATURES. -

- **Audio Type** - Balanced or un-balanced on terminal blocks.
- **Input (Level) Adjustment Capability (-10dB to +15dB)** - Each input via RS-232, front panel, and G.R.I.P software.
- **Output (Volume) Adjustment Capability (Mute, -59.5dB to +15dB)** - Each input via RS-232, front panel, and G.R.I.P software.
- **No Zipper Effect** - Lassen routing switchers employ zero crossover chip technology which eliminates the annoying "zipper sound effect" associated with digital volume controls.
- **Audio Mute Capability.** -
- **Crosstalk** - 80dB @ 1kHz & 70dB @ 20kHz.
- **S/N (20 - 20kHz)** - 90dB.

DIGITAL AUDIO FEATURES -

- **Standards** - Balanced AES/EBU.
- **Jitter** - +/- 20ns.

OTHER FEATURES -

- **Firmware Updates** - Downloadable.
- **Control** - Local front panel control with 80 character LCD readout.
RS-232/422 plus RS-485 for optional control panels.
IP (Ethernet) control.
G.R.I.P: Windows® - based routing switcher setup/diagnostic software.
- **Redundant Power Supplies** - Optional on 32x16 & 32x32 models.
- **Approvals** - UL & CE.
- **Control Panels (Optional)** - Programmable, Single Bus and XY.



LASSEN 3232HDEE 32x32

HD-SDI AND SDI VIDEO WITH 2 CHANNELS OF AES AUDIO.

SPECIFICATIONS

ANALOG VIDEO

| | |
|-------------------------|---|
| INPUT IMPEDANCE | 75Ω nominal |
| INPUT CONNECTOR TYPE | BNC |
| VIDEO INPUT LEVEL | 300mV to 2.5V P-P |
| VIDEO BANDWIDTH | 300MHz (-3dB) |
| CROSSTALK | 80dB @ 1MHz -47dB @ 100MHz |
| 1 INPUT TO MANY OUTPUTS | All electrical specifications remain the same |
| VIDEO GAIN | Unity (adjustable per channel +/- 1.5dB) |

ANALOG AUDIO

| | |
|--|--|
| MAX. INPUT AMPLITUDE | +24dBu |
| INPUT IMPEDANCE | >20kΩ |
| OUTPUT IMPEDANCE | <50Ω |
| VOLTAGE GAIN (ADJUSTMENT RANGE IF ANY) | Unity +/- 0.75dB max (+/- 0.25 typical) Input adjust range: -8dB to +20dB Output adjustment range: +15dB to fully off (Mute) |
| FREQUENCY RESPONSE | 20Hz to 20kHz +/- 0.5dB (typical -3dB @ 120kHz) (unity gain) |
| S/N RATIO (20 TO 20KHZ) | 96dB (20-20kHz unweighted - unity gain) |
| CROSSTALK (ALL INPUTS HOSTILE) | <-80dB @ 1kHz (unity gain) <-60dB @ 10kHz (unity gain) |
| IM & THD (20 TO 20KHZ) | THD: <0.025% (20Hz - 20kHz @ +4dBu) (unity gain) IM: <0.025 SMPTE-DIN @ +4dBu (unity gain) <0.01% CCIF @ +16dBu (unity gain) |
| MAX OUTPUT AMPLITUDE | +24dBu balanced +18dBu unbalanced |
| AUDIO CONNECTORS | 5 pin per stereo input or output Every IO can be connected to be either balanced or unbalanced |

SDI VIDEO

| | |
|--------------------------------|------------------------------|
| DATA RATES | up to 360 Mbps/sec |
| DATA TYPES | SMTE 310, SMPTE 259, DVB-ASI |
| INPUT CABLE EQUALIZATION RANGE | 0 - 200 meters |
| INPUT RETURN LOSS | >15dB |
| OUTPUT LEVEL | 750 - 850mVp-p |
| OUTPUT JITTER | <0.2 UI |
| OUTPUT RETURN LOSS | >15dB |
| SIGNAL CONNECTORS | BNC |

DIGITAL AUDIO

| | |
|------------------------|--|
| DATA RATES | AES3: Balanced; AES3ID: Unbalanced |
| CONNECTOR | AES3: XLR/phoenix ; AES3ID: BNC |
| INPUT/OUTPUT IMPEDANCE | AES3: 110Ω; AES3ID: 75Ω |
| OUTPUT LEVEL | AES3: 2-7Vp-p; AES3ID: 10Vp-p |
| CABLE | AES3: STP; AES3ID: Coax |
| MAX. DISTANCE | AES3: 100m; AES3ID: 1000m |
| MIN. INPUT | AES3: 2Vp-p; AES3ID: 32Vp-p |
| EQUALIZATION | AES3: Optional; AES3ID: Optional |
| JITTER | AES3: +/- 20ns; AES3ID: +/- 20ns |
| BANDWIDTH | AES3: 1MHz - 6MHz; AES3ID: 1MHz - 6MHz |

HD-SDI VIDEO

| | |
|--------------------------------|--|
| DATA RATES | up to 1.485 Gbits/sec |
| DATA TYPES | SMTE 310, SMPTE 259, SMPTE 292, DVB-ASI |
| INPUT CABLE EQUALIZATION RANGE | 0 - 100 meters for SMPTE 292 0 - 200 meters for all other stds. |
| INPUT RETURN LOSS | >15dB up to 1.5GHz |
| OUTPUT LEVEL | 750 - 850mVp-p |
| OUTPUT JITTER | <0.2 UI |
| OUTPUT RETURN LOSS | >15dB up to 1.5GHz |
| SIGNAL CONNECTORS | BNC |