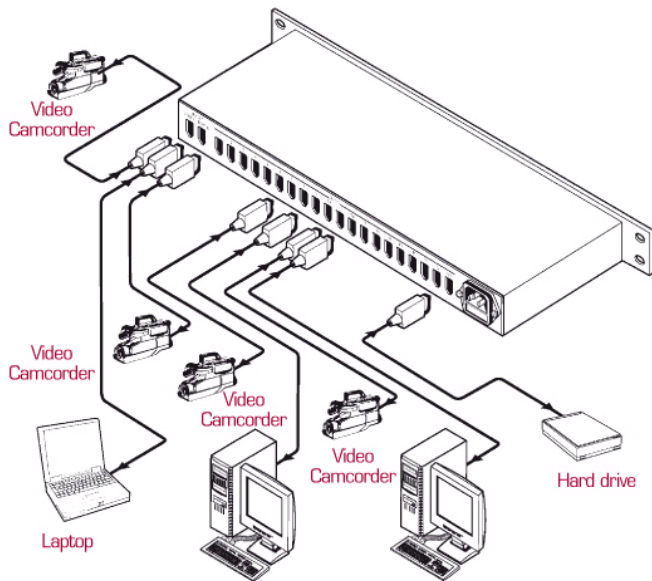


**VM-20FW****1:20 FIREWIRE DISTRIBUTION AMPLIFIER / HUB**

The VM-20FW is a distribution amplifier/hub for FireWire (IEEE-1394) signals. It equalizes and reclocks one of two FireWire inputs and distributes it to 20 identical outputs.

**DESCRIPTION**

- Standards - 1394a 1995.
- Transfer Rate - 100/200/400Mbps.
- World Wide Power Supply -110-230V AC.
- Standard 19" Rack Mount Size - 1U.

**SPECIFICATIONS**

STANDARDS:	Compliant with IEEE 1394a-1995.
PORTS:	20 IEEE-1394a serial ports + 2 selectable IEEE-1394a ports for source.
BUS TRANSFER RATE:	100/200/400 Mbps.
DEVICE INTERFACE:	400 Mbps, 20+2 ports, 3.3V (PHY).
CONTROL:	Reset; Channel A/B selection.
CABLE:	IEEE-1394a 6 pin.
LEDS:	Power LED; 20 LEDs for Link Ready (cable inserted OK).
COMPATIBLE:	PC/MAC.
POWER SOURCE:	110-230VAC, 25VA.
DIMENSIONS:	19-inch (W), 7-inch (D) 1U (H) rack-mountable.
WEIGHT:	2.8kg. (6.2 lbs.) approx.