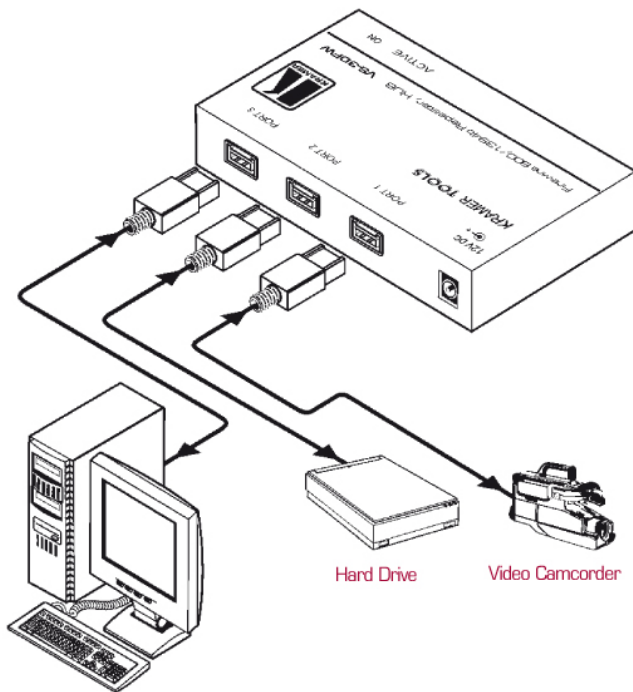


VS-30FW**FIREWIRE 800/1394B REPEATER/HUB**

The VS-30FW is a high performance bi-directional hub/repeater for 6-pin FireWire 800 (IEEE 1394b) signals. It will increase the number of ports available and/or will extend the distance of FireWire cable runs.

**DESCRIPTION**

- Ports - 3 bilingual IEEE 1394b 800Mbps (S800).
- Range - Doubles FireWire cable range from 14.75' (4.5m) to 29.5' (9m). Multiple units can be cascaded to extend the range to up to 236' (72m).
- Hot Swapping - Supports Plug and Play.
- Transfer Rates - 100, 200, 400 and 800Mbps.
- ESD Protection - Incorporates Kramer's Spark-Guard Pro™ signal protection circuitry to help protect against ESD (electrostatic discharge) which can damage digital equipment.
- Compact Size - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

SPECIFICATIONS

- PORTS:** Three Bilingual IEEE 1394b 800Mbps (S800) Ports
- TRANSFER RATE:** 100/200/400/800 Mbps (S800, S400, S200, S100)
- STANDARDS:** Fully supports the provisions of the IEEE P1394b Revision 1.33+ at 1 Gigabit signaling rates; Fully supports the provisions of the IEEE 1394-1995 Standard for High Performance Serial Bus and the P1394a Supplement; Fully interoperable with FireWire™ and i.LINK™ implementations of IEEE Std 1394; Provides three fully backward compatible (1394a 2000 fully compliant) bilingual P1394b cable ports at 100/200/400/800 Megabits per Second (Mbps); Fully compliant with OpenHCI requirements; Full P1394a support includes: Connection Debounce, Arbitrated Short Reset, Multispeed Concatenation, Arbitration Acceleration, Fly-By Concatenation, Port Disable/Suspend/Resume; Extended Resume Signaling for Compatibility with Legacy DV Devices;
- POWER SOURCE:** 12 VDC, 500mA
- DIMENSIONS:** 12cm x 7.5cm x 2.5cm (4.7" x 2.95" x 0.98", W, D, H)
- WEIGHT:** 0.3 kg. (0.67 lbs.) approx.
- ACCESSORIES:** Power supply (12V, 500mA), mounting bracket
- OPTIONS:** Adapting cables, Powerful Power supply (12V, 2.1A)