

MediaPOINTE DMR210e

Digital Media Recorder



The MediaPOINTE Digital Media Recorder DMR210e streams and records videoconferences, meetings, and presentations in high resolution. This powerful MPEG-4 solution is capable of simultaneous recording and streaming (unicast or multicast) at up to 30fps, it also boasts MediaPOINTE's *CopyMe!* technology allowing for immediate distribution of content via DVD-ROM, USB flash drive, or FTP off-load for added portability of content. Besides the web interface the DMR210e also has a set of front panel controls, on-screen menus, and a remote control which make this system a snap to use, both in content creation and distribution.

Product Highlights


- HD and WXGA resolutions
- Up to 1000 hours of local storage
- Local playback, download, and network streaming anytime...anywhere
- Automated TANDBERG functionality
- MPEG-4 compression
- MediaPOINTE's *CopyMe!* CD and USB flash drive distribution

Applications

- Healthcare - HD video based training
- Corporate - Recording of HD videoconferences
- Public Safety - Alerts & announcements

SPECIFICATIONS

MediaPOINTE DMR210e

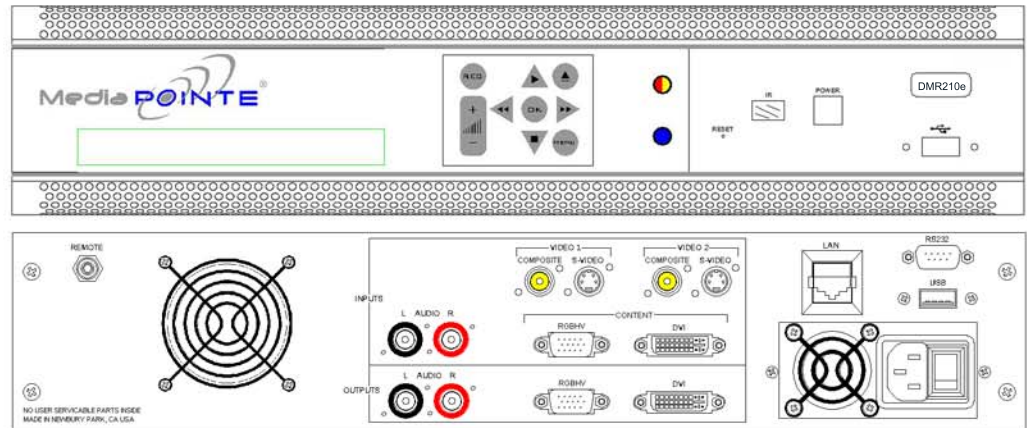

Features

- Up to 1000 hours of recording time at XGA resolution
- Record/Stream video resolutions and Hi-Res sources
- HD Resolutions
- MPEG-4
- CopyMe – content to go (via USB & CD/DVD-ROM)
- Configurable Recording Profiles.
- Configurable frame-rate
- Configurable bit-rate – up to 5120 kbps
- Unicast Streaming (up to 30 viewers)
- Multicast Streaming
- Local content storage (up to 320 GB)
- Local playback while recording
- Automatic upload to server via FTP
- Email Notifications
- Automated TANDBERG functionality

Capture Resolutions and Frame Rates

- Frame Rate – up to 30 fps
- Input resolutions – up to 2048 x 1536
- Native recordings up to UXGA (1600x1200)

A/V Inputs

- 2 S-Video Inputs (one for future use)
- 2 Composite Video Inputs (one for future use)
- 1 DVI-D Input
- 1 RGBHV Input (on 15 pin HD connector)
- 2 RCA Stereo Audio Inputs

A/V Outputs

- 1 DVI-D Output
- 1 RGBHV Output (on 15 pin HD connector)
- 2 RCA Stereo Audio Outputs

Connectivity

- 1 LAN/Gigabit Ethernet 10/100/1000 (RJ-45)
- 1 Serial DTE RS-232 (9 pin male)
- 3.5 mm TTL Input
- 2 USB 2.0 Type A Female

Control

- Front control panel
- Remote Momentary Closure Sense
- RS-232 serial port
- Telnet
- Web Interface
- Infrared remote control

Physical

- 19" x 3.5" x 14"
- Weight 23 Lbs.

Power

- Universal 100-240 V A/C 50/60 Hz internal power supply

Phone: 805-376-1740

Fax: 805-480-3770

Email: info@mediapointe.com

web: www.mediapointe.com

Advanced Media Design
667 Rancho Conejo Blvd.
Newbury Park, CA 91320