



Densité 3 mini


Compact, half 1RU frame for two modules

The new Densité 3 mini is a compact, half rack width (1RU high) desktop version of the Densité 3 frame, designed for one or two Densité 3RU/2RU cards. The 2RU cards are fitted using a card extender. The housing frame is powered by a universal external power supply. A second, redundant external power supply can be added for additional resilience. The modules

for the frame are hot-swappable, and are configured automatically when a card is replaced. The housing frame can be controlled by the RCP-200 advanced control panel, the RCP-100 basic control panel, and the iControl Solo PC-based GUI. A front panel control interface is available for simple 'set and forget' type adjustments.

Key Features and Benefits

- ⊕ Small form factor Densité 3 frame for one or two 3RU/2RU cards
- ⊕ Multiple video and audio formats can be fitted in a single frame
- ⊕ Backwards compatible with Densité 2 modules
- ⊕ Easy configuration by front panel or remotely via the optional Ethernet frame controller
- ⊕ Choice of control panels, including the RCP-200 advanced remote panel, the RCP-100 basic remote control panel, and the PC-based iControl Solo GUI
- ⊕ External power supply with locking connector, and a second connector for a redundant power supply (option)
- ⊕ Supports full range of Densité Series modules
- ⊕ Frame can be stacked without additional cooling spaces
- ⊕ Ethernet frame controller option with redundant Ethernet connection
- ⊕ 1RU tray for rack mount installation of up to two Densité 3 mini frames

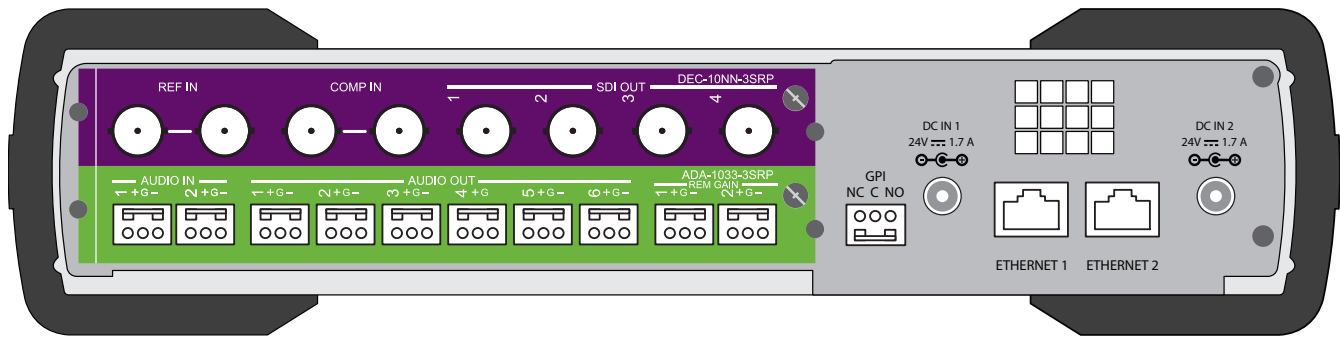

Technical Specifications

MECHANICAL

DIMENSIONS: 1.7 in (43 mm) x 8.4 in (214 mm) x 12 in (305 mm)
WEIGHT: 4.3 lbs (2 kg)

POWER

INPUT RANGE: DC 22~26 V
FRAME RATING: 35W Max
RATING PER SLOTS: 12.5W Max
OPERATING TEMPERATURE: 0-40 °C
ALARM: GPI contact (NO/NC)

CONTROL & MONITORING

COMMUNICATION PORTS: Optional ETHERNET 10/100 BASE-T

COOLING

FANS: 1 on frame

Ordering Information

Densité 3 mini Housing frame with (1) PSU (AC In), (1) Basic Controller w/front control panel, (1) blank rear panels SRP **Remote Control** iControl, iControl Solo, RCP-200, RCP-100

Options

Densité 3 mini-PSU Redundant external PSU for Densité 3 mini
 Densité 3 mini-Tray 1RU Tray for 2 Densité 3 mini
 Densité 3 mini-CPU-ETH2 Controller card with redundant Ethernet ports
 Densité-CPU-ETH2-OPT-LNK Full link redundancy using Channel Bonding on Densité 3 mini-CPU-ETH2