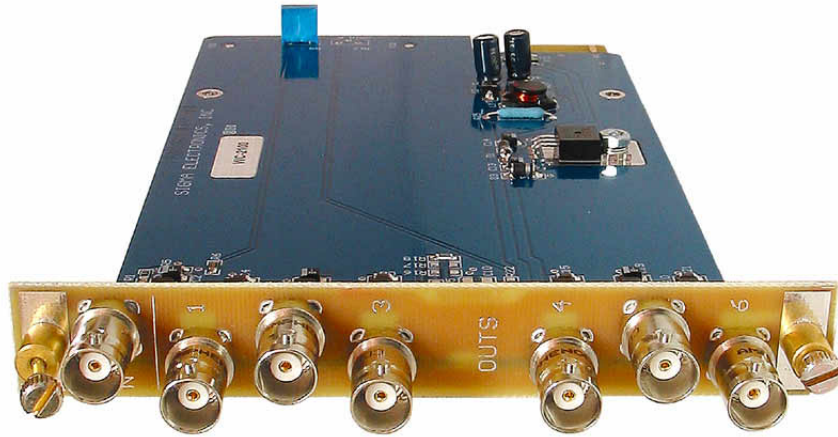


1X6 WORD CLOCK (SDIF2) DA - WC2100**FEATURES**

- High Quality, Low Cost
- 1x6 Word Clock DA
- For 48 kHz TTL, SDIF2 Word Clock signals
- 1 slot 2100 Series module

SPECIFICATIONS**INPUTS**

One (1), Terminated, 75 Ω	
Level	TTL
Return Loss	35 dB min. at 5 MHz
Connectors	BNC
Operating Temp.	0 $^{\circ}$ to +50 $^{\circ}$ C

OUTPUTS

Six (6), 75 Ω , source terminated	
Level	TTL
Return Loss	35 dB min. at 5 MHz
Tilt, field, & line	DC Coupled, 0.1% max.
Transient Response	0.5%, max overshoot, ringing
Out to Out Isolation	50 dB min. at 5 MHz
Electrical Length	20 nsec
Connectors	BNC

Prices and Specifications are subject to change without notice.