

12" LCD TVs

LCD-1212T

LCD-1212TC

LCD-1212TL


LCD-1212TW



LCD-1212T Free-standing TV



LCD-1212TC Counter-mount TV

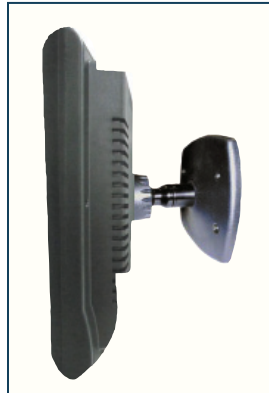

LCD-1212TW Wall-mount TV



LCD-1212TL Flush-mount TV

- Cable ready ATSC/NTSC/QAM TV tuner
- All cables concealed for LCD-1212TC and LCD-1212TW
- LCD-1212TC and LCD-1212TW in custom 4-way mounts:
 - LCD-1212TC: Pan/Tilt: 30°/30°/60°/0° (L/R/T/B)
 - LCD-1212TW: Pan/Tilt: 30°/30°/0°/60° (L/R/T/B)
- Aspect ratio: 16:9
- Built-in dual front speakers
- Front controls for power, menu, channel up/down, volume up/down, mode, mute
- On-screen display for brightness, contrast, tint, H/V position, saturation, sharpness
- Response time: 50mS (rising/falling)
- Wide Viewing angle
- IR remote control
- LCD-1212T case is made of durable black ABS plastic, comes with removable desk stand, and conversion plate makes the unit VESA 75mm FPMPMI compliant
- LCD-1212TC cases is made of durable black ABS plastic, and mount is watertight to protect counter and cabinetry
- LCD-1212TL has black metal front with durable ABS plastic back
Installer's Cut-Out (WH): 11.8" x 8.7"
- LCD-1212TW cases is made of durable black ABS plastic
- LCD-1212T and LCD-1212TL are powered by external switching power supply
- LCD-1212TC and LCD-1212TW come with built-in AC power (electrician required for connection)
- LCD-1212TW attaches to double gang electrical box

Optional Accessories

HM-400	Under-cabinet hinge mount
WM-302	4-way adjustable wall mount
WM-30	Fixed and locking wall mount bracket
WM-31	Fixed wall mount bracket

Resolution: 1280(H) x 768(V) dots

Brightness rating: 300 cd/m² (Nit)

Contrast Ratio: 600:1

Display: 12.1" TFT LCD active matrix

Back Light: Built-in (CCFT)

Input Signal: ATSC/NTSC/QAM/CATV

Dot Pitch: 0.2055 (H) x 0.2055 (V)mm

Colors: 16.7M

Number of Pixels: 983,040 dots

Viewing angle L/R/T/B: 60/30/20/10 degrees

Pixel Configuration: RGB Vertical Stripe

Input Signal Level: 1.0V P-P (positive) 75 Ohm

LCD-1212T: Dimensions (WHD): 300 x 220 x 45mm / 11.8" x 8.7" x 1.8"

LCD-1212TC: Dimensions (WHD): 300 x TBD x TBD mm / 11.8" x TBD x TBD

LCD-1212TL: Dimensions (WHD): 337 x 259 x 45.7mm / 13.3" x 10.2" x 1.8"

LCD-1212TW: Dimensions (WHD): 300 x 220 x 162.6mm / 11.8" x 8.7" x 6.4"

Speakers: 4 ohms, 1 W x 2

Actual visible screen size (WH): 266 x 161mm / 10.5" x 6.3"

Operating temperature: 50~104°F or 10~40°C

Power Requirement: Regulated 12VDC, 4A, negative ground

Power Consumption: 60 W (max)

Includes switching power supply: 110 ~230 VAC, 50/60Hz, DC 10~16V, 4A

Rear Terminal Connections: Composite: RCA video IN/OUT jacks

TV: "F" connector for CATV

Audio: RCA R/L IN/OUT jacks, 2 headphone jacks

Power: LCD-1212T / LCD-1212TL: 2.1mm DC IN

LCD-1212TC / LCD-1212TW:

Raw wire for AC connection by electrician

LCD-1212T: Weight: Net: Est. 4.3 kg. / 9.5 lbs.

Gross: Est. 6.4 kg. / 14 lbs.

LCD-1212TC: Weight: Net: Est. 5.2 kg. / 11.5 lbs.

Gross: Est. 7.3 kg. / 16 lbs.

LCD-1212TL: Weight: Net: Est. 5.2 kg. / 11.5 lbs.

Gross: Est. 7.3 kg. / 16 lbs.

LCD-1212TW: Weight: Net: Est. 4.8 kg. / 10.5 lbs.

Gross: Est. 6.8 kg. / 15 lbs.

1319 Dexter Ave. N. • Ste. 020 • Seattle, WA 98109

Tel: 206-623-6000 • FAX: 206-623-6609

E-mail: sales@totevision.com

http://www.totevision.com

