


PANORAMAdtv, the video division of Wohler Technologies, Inc.

# PANORAMAdtv MON8-1




Compact Dual Standard Eight Screen LCD Color Video Monitor

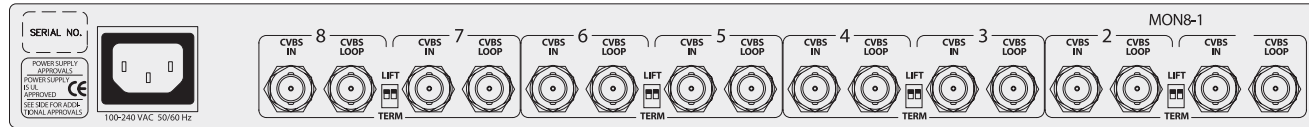

## Features:

- Eight 1.8" Color LCD Video Screens
  - Ideal for Quick Confidence Checks of Multiple Channels
  - 1 Composite Video Input with a Loop-Through Output - Per Screen
  - NTSC & PAL Autosensing
  - Requires only 1U of Rack Space
  - Internal AC Power Transformer, no Power "Bricks"
- Hanging behind the Unit

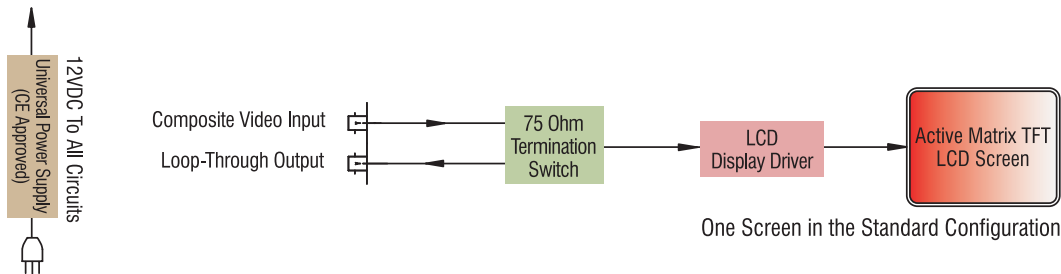

## Specifications:

Video inputs	. . . . . 8 composite with loop through, 1 per screen
Video input termination	. . . . . Selectable 75 Ohms
Video outputs	. . . . . 8 composite with loop through, 1 per screen
Input signal	. . . . . NTSC or PAL, autosensing
Aspect ratio	. . . . . 4:3
Display size	. . . . . 1.75" (diagonal) x 8
Active area per display	. . . . . 35.6 x 26.6mm
Display resolution (dots & lines)	. . . . . 280 (horz) x 220 (vert)
Dot pitch (mm)	. . . . . 0.127 (horz) x 0.121 (vert)
Color configuration	. . . . . RGB Delta
Surface treatment	. . . . . Anti-glare (typ 6% haze)
Panel illumination	. . . . . LED backlight
Contrast ratio	. . . . . 150 (typ)
Brightness (nits)	. . . . . 180 (typ)
Viewing angle (degrees)	. . . . . top=10°, bottom=30°, left=45°, right=45°
Color Temp (K)	. . . . . 7000
Display adjustments	. . . . . Fixed, factory preset
Chassis	. . . . . EIA 310 spec (1RU) x 6.5" deep
Weight	. . . . . 3.5 lbs
Power consumption	. . . . . 33 VA
Power supply	. . . . . 100-240VAC 50/60 Hz



Video Monitoring

Level Metering

Alarm Systems

Audio Monitoring