


NEW VMSSA-1
"Confidence Plus" 2 Channel SD-SDI Embedded Audio Confidence Monitor



Large Front Panel Image	Large Rear Panel Image
Printable PDF Product Datasheet not yet available	

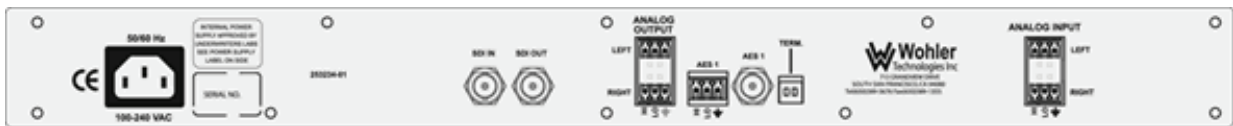

- Electrical Distortion Less than 0.3% at any level below limit threshold
- Acoustic Distortion: Typically <2% at any level below limiting, 100Hz - 15KHz

FEATURES:

- Only One Rack Space High
- 96dB SPL at 2 feet (0.6m)
- VM Series "Confidence" speaker system
- Select from Balanced or Unbalanced AES/EBU digital and Analog Sources
- 1 Balanced AES/EBU Input on mini Phoenix
- 1 Unbalanced AES/EBU Input on BNC
- 2 Balanced Analog Inputs (1 Stereo) on mini-Phoenix Connectors
- 2 Balanced Analog Outputs (1 Stereo) on mini-Phoenix Connectors
- 2 Ten-Segment VU Level Meters
- 1 SDI input with reclocked SDI out
- Phase / Polarity Indication
- Front Panel Speaker Muting
- Thorough Magnetic Shielding for Placement next to Video Monitors
- Headphone Jack, Mutes Speakers
- Lightweight and Shallow-Depth Chassis
- Dual-Format HD-SDI & SD-SDI Version Also Available: [VMMDA-1](#)