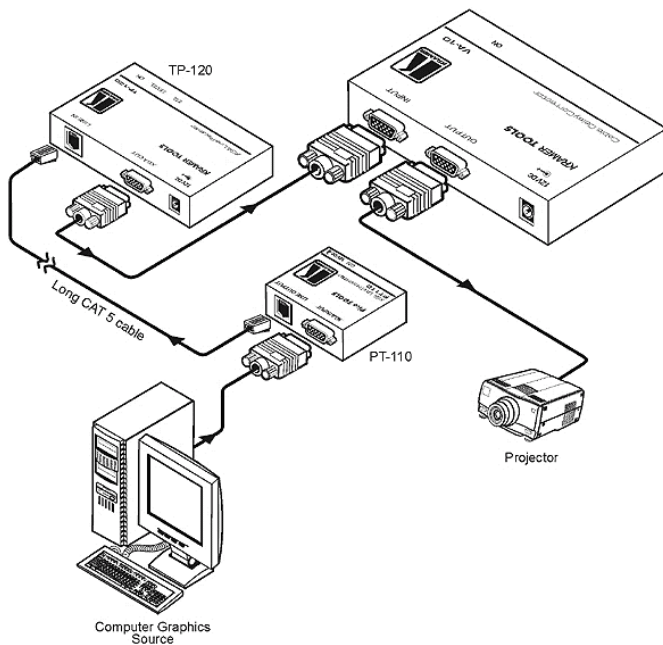


**VA-10****RGB CABLE DELAY CORRECTOR**

The VA-10 corrects skew (delay) errors in long RGB or twisted pair cable runs. Individual R, G, and B skew adjustments correct video delay errors in analog and twisted pair applications which are seen as mis-convergence on the display.

**DESCRIPTION**

- Input/Output - HD-15 Connectors.
- Control - R, G, & B delay (skew) adjustments.
- Compact Size - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

**SPECIFICATIONS**

INPUT:	1 analog red, green, blue input signals - 0.7Vpp/75ohm, H & V sync, TTL level, on an HD15F connector
OUTPUTS:	1 analog red, green, blue output signals - 0.7Vpp/75ohm, H & V sync, TTL level, on an HD15F connector
MAX. OUTPUT LEVEL:	1Vpp.
BANDWIDTH (-3DB):	Up to UXGA
DIFF. GAIN:	0.8%.
DIFF. PHASE:	0.7%.
K-FACTOR:	0.4%.
S/N RATIO:	71dB.
CONTROLS:	Delay control via 3 (RGB) trimmers, 0 to 62ns.
COUPLING:	AC IN and OUT
POWER SOURCE:	12VDC, 150mA
DIMENSIONS:	12 cm x 7.5 cm x 2.5 cm (4.7" x 2.95" x 0.98", W, D, H).
WEIGHT:	0.3 kg (0.67 lbs.) approx.
ACCESSORIES:	Power supply, mounting bracket
OPTIONS:	19" rack adapters RK-T1, and/or RK-T3.