


VP-32xIn

3X1:2 COMPUTER GRAPHICS VIDEO & BALANCED STEREO AUDIO SWITCHER



The VP-32xIn is a high performance switcher for computer graphics video signals with resolutions ranging from VGA through UXGA and higher, and balanced stereo audio. It switches any one of three inputs simultaneously to two identical outputs.

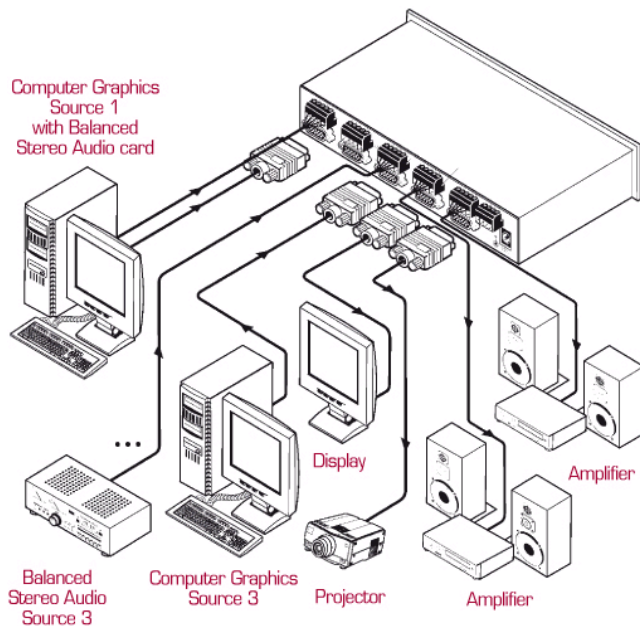

DESCRIPTION

- High Bandwidth - 450MHz (- 3dB).
- HDTV Compatible.
- Control - Front panel & contact closure.
- Desktop Size - Compact size. Two units can be rack mounted side-by-side in a 1U rack space with the optional RK-80 adapter.

SPECIFICATIONS

<p>INPUTS:</p> <p>OUTPUTS:</p> <p>MAX. OUTPUT LEVEL:</p> <p>BANDWIDTH (- 3DB):</p> <p>DIFF. GAIN:</p> <p>DIFF. PHASE:</p> <p>K-FACTOR:</p> <p>S/N RATIO:</p> <p>CROSSTALK (ALL HOSTILE):</p> <p>CONTROLS:</p> <p>COUPLING:</p> <p>AUDIO THD + NOISE:</p> <p>AUDIO 2ND HARMONIC:</p> <p>POWER SOURCE:</p> <p>DIMENSIONS:</p> <p>WEIGHT:</p> <p>ACCESSORIES:</p> <p>OPTIONS:</p>	<p>3 VGA/UXGA on HD15F connectors. 3 balanced stereo audio 10kΩ on 5 pin terminal block connectors. 1 detachable 4 pin terminal block connector for remote control.</p> <p>2 VGA/UXGA on HD15F connectors. 2 balanced stereo audio 50Ω on 5 pin terminal block connector.</p> <p>Video: 2Vpp. Audio: 7Vpp.</p> <p>Video: 450MHz, Fully Loaded. Audio: > 100kHz.</p> <p>0.03%.</p> <p>0.03 Deg.</p> <p>< 0.05%.</p> <p>Video: 74dB. Audio: 83dB unweighted.</p> <p>Video: - 57dB @ 5MHz. Audio: - 88dB @ 1kHz.</p> <p>Front panel electronic push buttons, contact closure remote control.</p> <p>Video: DC. Audio: Input: AC; Output: DC.</p> <p>0.022%.</p> <p>0.004%.</p> <p>12 VDC 146mA.</p> <p>22cm x 18cm x 4.5cm (8.7" x 7" x 1.8") W, D, H.</p> <p>1.1kg (2.4lbs) approx.</p> <p>Power supply.</p> <p>VA-50P 6 Port Universal 12-Volt Power Supply. 19" rack adapter RK-80.</p>
--	---